


ELETTROMAGNETIC LEVEL GAUGE

"LG2/500"

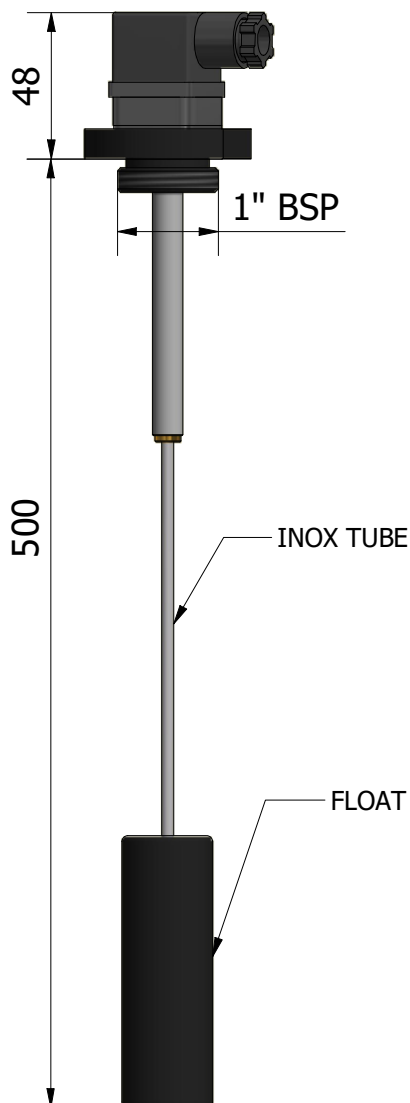

This series allows to out the rod and choose the distance of the float.

ASSEMBLY

- In vertical position with three type of hydraulic connection in only one execution:
- Flange two holes 180°
- Flange three holes 120°
- 1" BSP

ELECTRICAL FEATURES:

- Electric connection according to DIN 43650
- Electric protection according to DIN 40050: IP65
- Electric reed with exchange contact
- Maximum load on contacts: 48 VAC0,5A - 48 VDC - 0,5A

TECHNICAL FEATURES:

- Max pressure: 5 Bar
- Max viscosity of the fluid: 150 cSt
- Fluid temperature: from -10°C to +100°C

Conform to ATEX II 3G Ex nC IIB T5 Gc IP65
II 3D Ex nC IIIB T100°C Dc IP65

Questa serie permette di tagliare l'asta e scegliere la distanza del galleggiante.

ASSEMBLAGGIO

- In posizione verticale con tre tipi di connessioneI in una sola esecuzione:
- Flangia due fori 180°
- Flangia tre fori 120°
- 1" BSP


CARATTERISTICHE ELETTRICHE:

- Collegamento elettrico secondo DIN 43650
- Protezione elettrica secondo DIN 40050: IP65
- Reed elettrico con contatto in scambio
- Carico massimo sui contatti: 48 VAC0,5A - 48 VDC - 0,5A

CARATTERISTICHE TECNICHE:

- Pressione massima: 5 Bar
- Viscosità max del fluido: 150 cSt
- Temperatura del fluido: da -10°C a +100°C

Conforme ad ATEX II 3G Ex nC IIB T5 Gc IP65
II 3D Ex nC IIIB T100°C Dc IP65

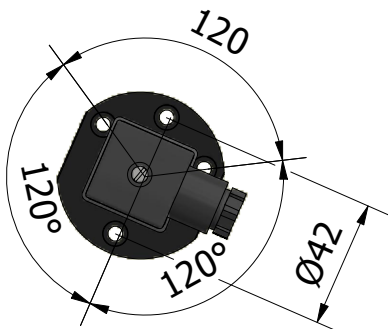

		Date	Name:	DESCRIPTION:	SCALE:
DRAWN:		15/05/2019	M.G.		
CHECKED:					
APPROVED:					
Projection:ISO128		FOX S.r.l.		DRAWING No/FILE NAME	SHEET
	Via Romagna 6 20090 Opera (MI) ITALY	LG2-500_Data Sheet		1 of 1	

THIS DRAWING IS PROPERTY OF FOX S.r.l. COPYRIGHT , PATENTS AND ALL INDUSTRIAL PROPERTY RIGHTS RESERVED